



NOTES:

- 1. SUBSTRATE:
FUSED SILICA
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

 S1: Ravg >98% @ 400 - 750nm (0 - 45°)
 Ravg >99% @ 400 - 750nm (0°)
 S2: NONE




3. FINE GRIND SURFACE

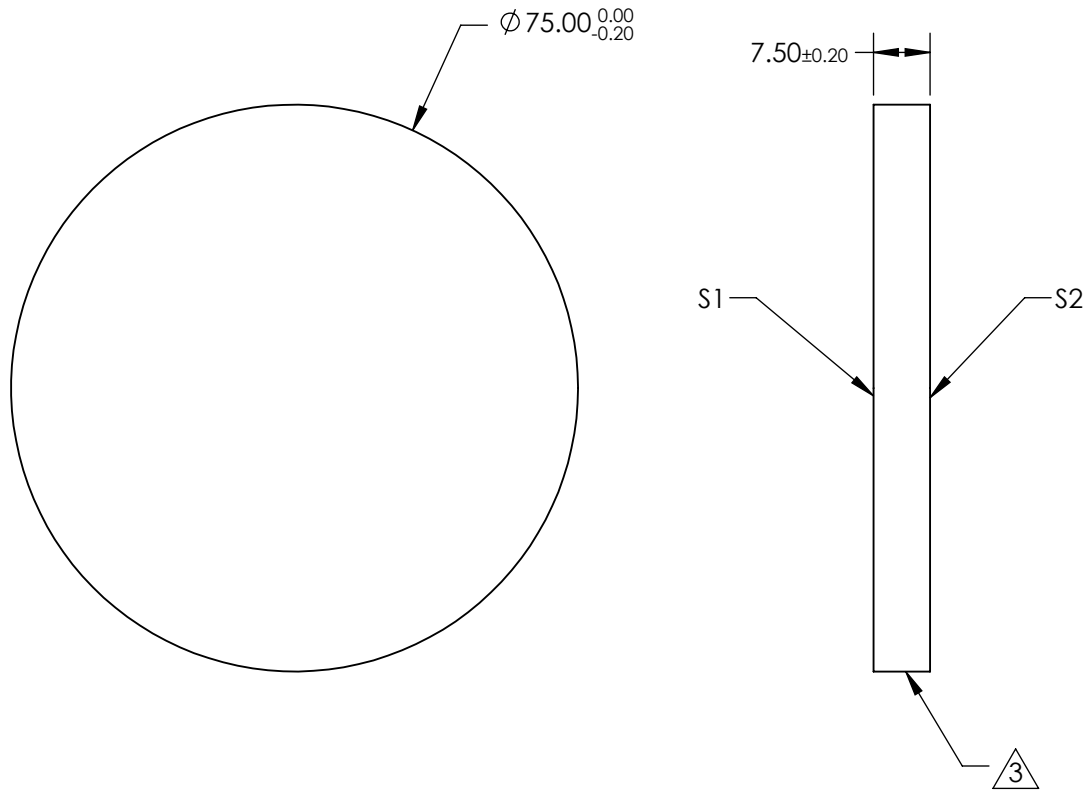


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE	$\phi 67.5$	N/A
SURFACE QUALITY	20-1	COMMERCIAL POLISH
SURFACE FLATNESS	$\lambda/10$ (BEFORE COATING)	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE: 75mm Dia. 400 - 750nm Broadband $\lambda/10$ Mirror

DWG NO: 24047

SHEET 2 OF 3