
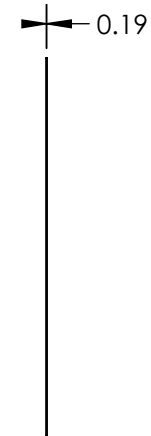
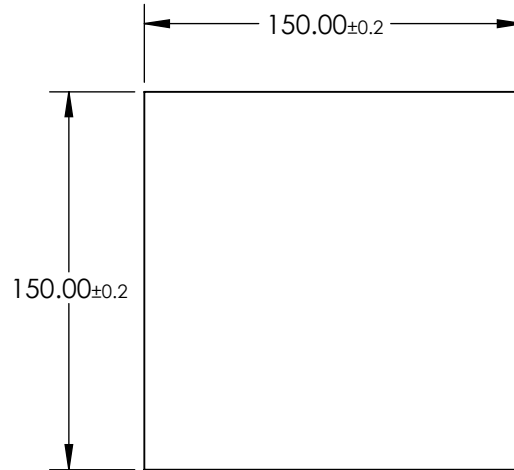


NOTES:

1. SUBSTRATE: CTA (Cellulose Triacetate)
2. OPERATING TEMPERATURE: -20 TO +70 °C
3. WAVELENGTH RANGE: 320 - 750NM
4. COATING: UNCOATED
5. TRANSMISSION (%)
  - SINGLE: 39 (325nm-400nm)
  - CROSSED: 0.04 (325nm-400nm)
6. ROHS COMPLIANT

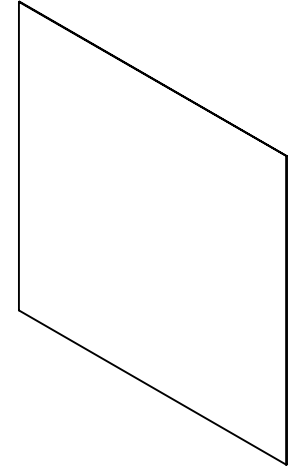

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS ARE FOR REFERENCE ONLY

**EO**<sup>®</sup> Edmund Optics<sup>®</sup>

**FOR INFORMATION ONLY:  
 DO NOT MANUFACTURE  
 PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION		TITLE	150 x 150mm UV Polarizing Film	
ALL DIMS IN	mm	DWG NO	25108	SHEET 1 OF 1