
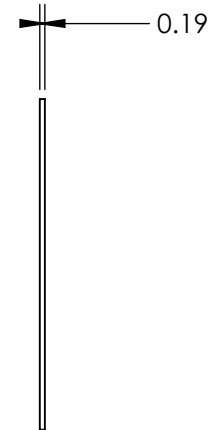
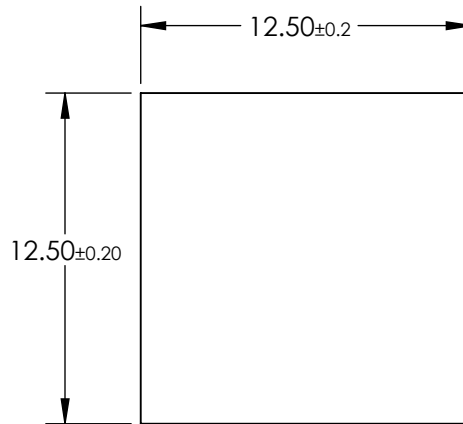


NOTES:


- 1. SUBSTRATE: CTA (Cellulose Triacetate)
- 2. OPERATING TEMPERATURE: -20 TO +70 °C
- 3. WAVELENGTH RANGE: 320 - 750NM
- 4. COATING: UNCOATED
- 5. TRANSMISSION (%)
 - SINGLE: 39 (325nm-400nm)
 - CROSSED: 0.04 (325nm-400nm)
- 6. ROHS COMPLIANT

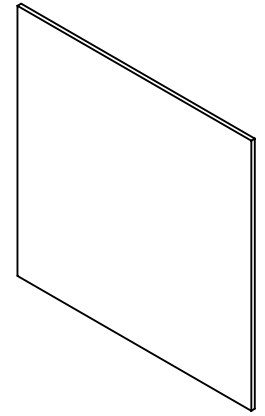

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO[®] Edmund Optics[®]

THIRD ANGLE PROJECTION 		TITLE	12.5 x 12.5mm UV Polarizing Film	
ALL DIMS IN	mm	DWG NO	25112	SHEET 1 OF 1