


NOTES:


1. SUBSTRATE:
FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
3. COATING (APPLY ACROSS CLEAR APERTURE)

S1:Ravg >98% @ 450 - 2000nm
 Ravg >98% @ 2000 - 10,000nm
 S2:NONE



4. FINE GRIND SURFACE


5. ROHS COMPLIANT

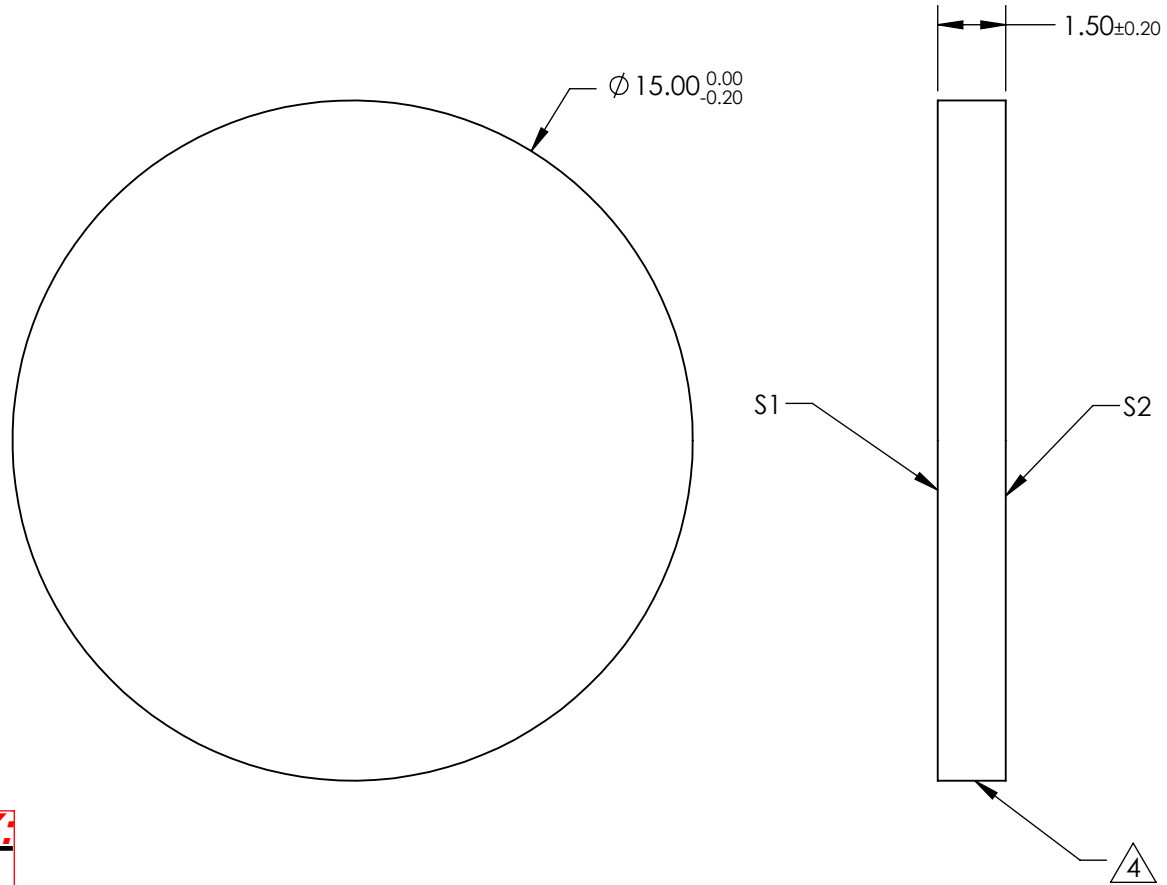

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

	S1	S2	THIRD ANGLE PROJECTION 		TITLE	15mm Diameter, 1.5mm Thick, Diameter Silver Coated, λ/10 Mirror	
SURFACE QUALITY	20-10	COMMERCIAL POLISH	ALL DIMS IN	mm	DWG NO	26370	SHEET 16 OF 28
SURFACE FLATNESS	λ/10 (Measured Pre-Coating)	N/A					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					