


NOTES:



1. SUBSTRATE:  
FUSED SILICA
2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
3. COATING (APPLY ACROSS CLEAR APERTURE)

S1:Ravg >98% @ 450 - 2000nm  
 Ravg >98% @ 2000 - 10,000nm  
 S2:NONE



4. FINE GRIND SURFACE

5. ROHS COMPLIANT

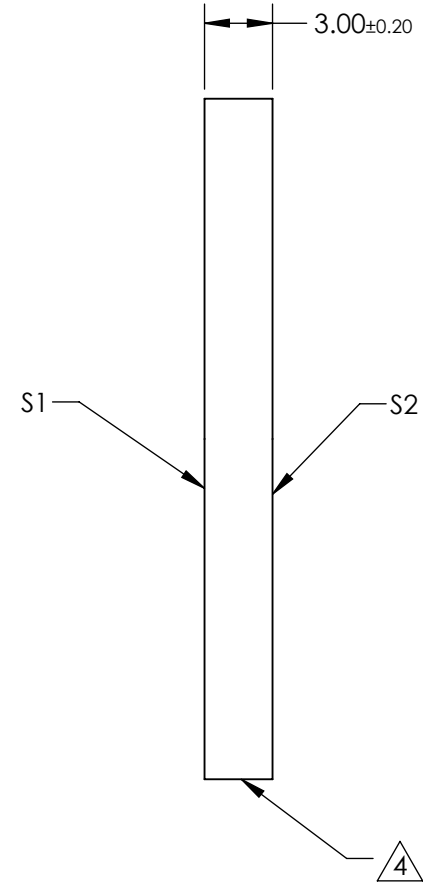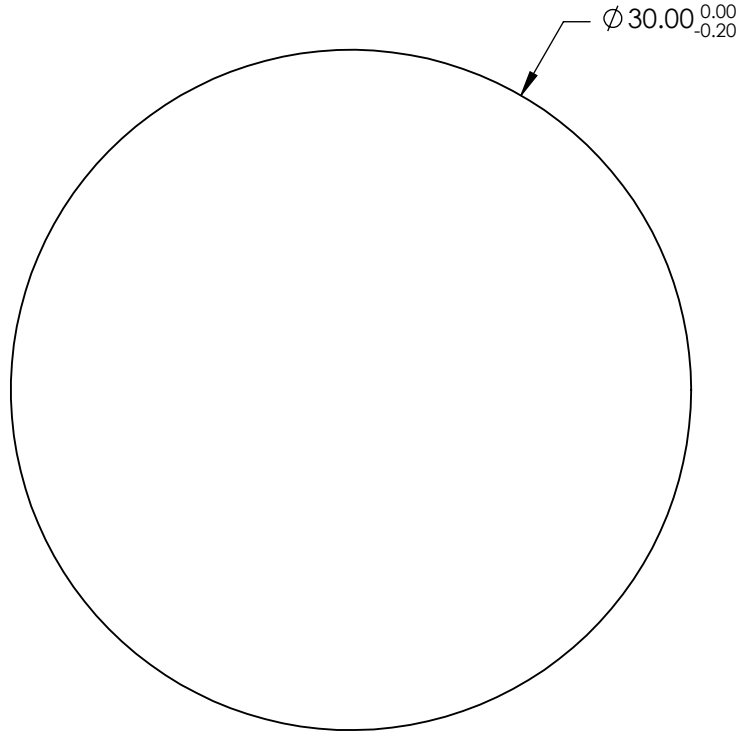

**FOR INFORMATION ONLY:  
 DO NOT MANUFACTURE  
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

|                  | S1                          | S2                  | THIRD ANGLE PROJECTION |    | TITLE  | 30mm Diameter, 3mm Thick, Diameter Silver Coated, λ/10 Mirror |                   |
|------------------|-----------------------------|---------------------|------------------------|----|--------|---|-------------------|
| SURFACE QUALITY  | 20-10                       | COMMERCIAL POLISH   |                        |    | DWG NO | 26382   | SHEET<br>28 OF 28 |
| SURFACE FLATNESS | λ/10 (Measured Pre-Coating) | N/A                 |                        |    |        |   |                   |
| BEVEL            | PROTECTED AS NEEDED         | PROTECTED AS NEEDED | ALL DIMS IN            | mm |        |   |                   |