


NOTES:

- 1. SUBSTRATE:  
SAPPHIRE (AL2O3)
- 2. SURFACE S2 TO BE PARALLEL WITH SUFACE S1 TO WITHIN  $\leq 3.5$  ARMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: R(AVG)<0.5% @ 350 - 700nm


4. FINE GRIND SURFACE

- 5. ROHS COMPLIANT

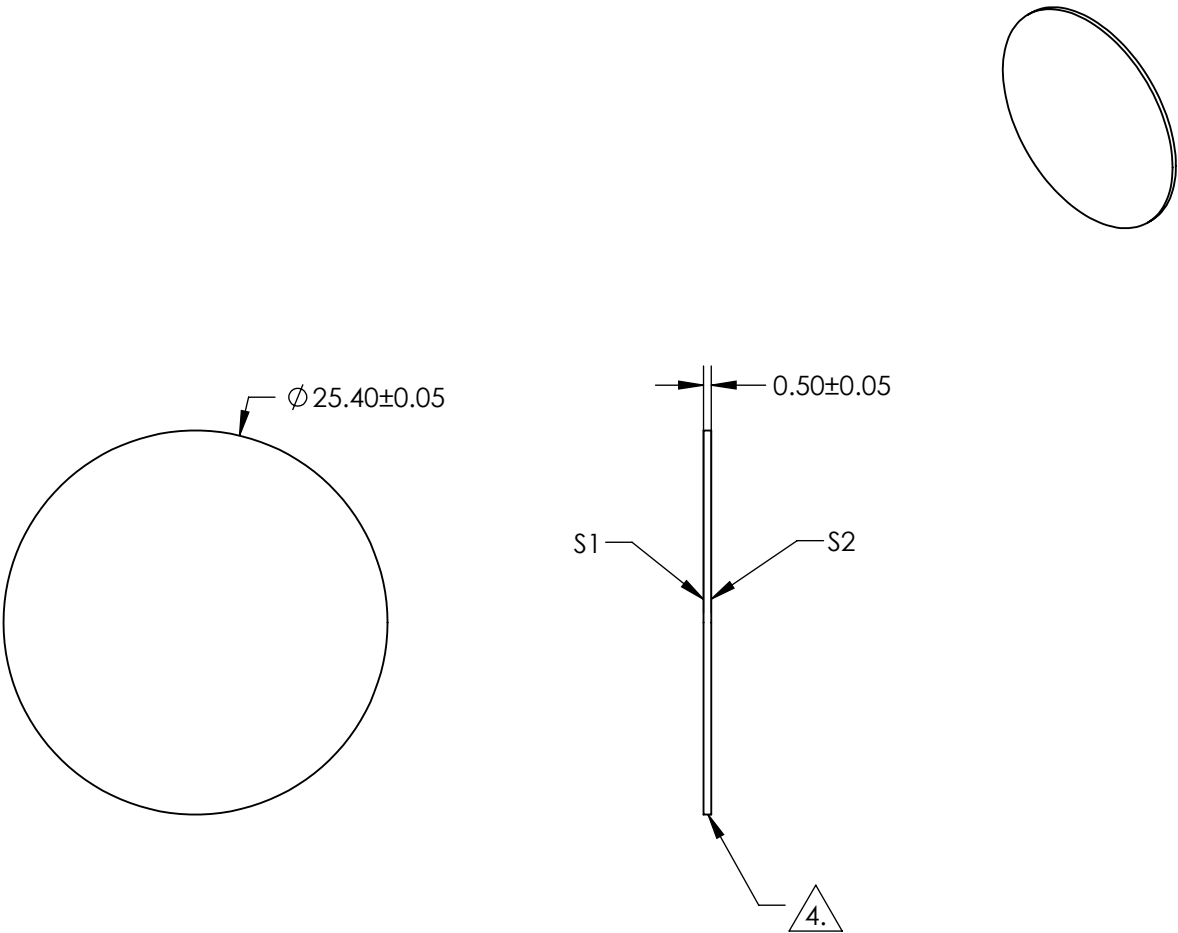

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	<div><div><div>THIRD ANGLE PROJECTION</div></div><div>Edmund Optics®</div></div>			
SHAPE	PLANO	PLANO				
CLEAR APERTURE	Ø 22.86	Ø 22.86				
SURFACE FLATNESS	2λ	2λ				
SURFACE QUALITY	80-50	80-50				
BIREFRINGENCE (no-ne)	0.008	0.008				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				
			ALL DIMS IN	mm	TITLE	25.4mm Dia., 0.5mm Thick, VIS-EXT AR Coated Sapphire Window
			DWG NO	28691	SHEET 27 OF 41	