

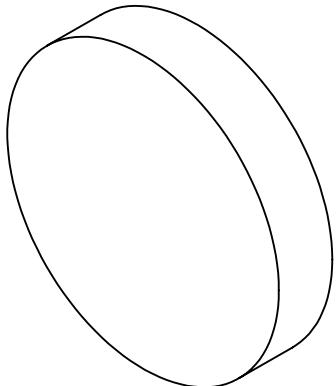


NOTES:

1. SUBSTRATE: Fused Silica (Corning 7980)
2. RoHS COMPLIANT
3. SURFACE S2 TO BE PARALLEL WITH SURFACE S 1 TO WITHIN ACRMINS
4. Coating (Apply Across Clear Aperture):
 - S1 & S2: Rabs $\leq 0.25\%$ @ 880nm
 - Ravg $\leq 1.25\%$ @ 400 - 870nm
 - Ravg $\leq 1.25\%$ @ 890 - 1000nm

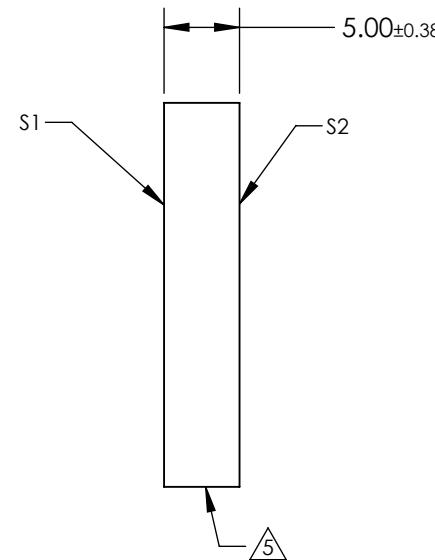

5. FINE GROUND SURFACE

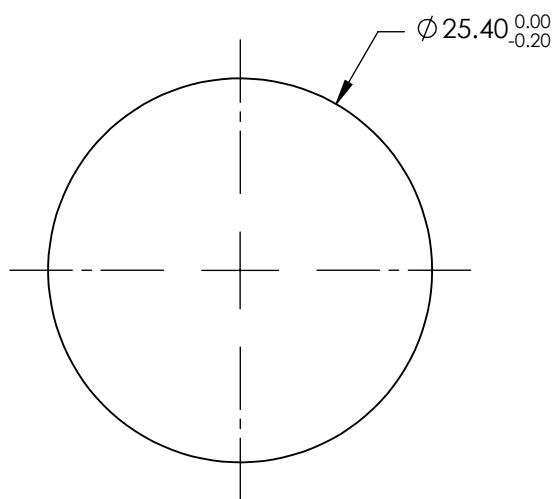

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
Shape	Plano	Plano
Surface Accuracy	1λ	1λ
Surface Quality	60-40	60-40
Clear Aperture	22.86	22.86
Bevel	Protected as Needed	Protected as Needed

THIRD ANGLE PROJECTION



Edmund Optics®

25.4mm Dia. 5mm Thick VIS-NIR Coated, 1λ
Fused Silica Window

ALL DIMS IN

mm

DWG NO

25312

SHEET
69 OF 101